




ECO PHYSICS nCLD 844 CMhr

APPLICATION EXAMPLES

- Burners and boilers
- Manufacturers of gas turbines
- Certification and calibration
- DeNOx Plants and SCR
- Refining of fuels and lubricants
- Assessment of ammonia slip
- Research and development

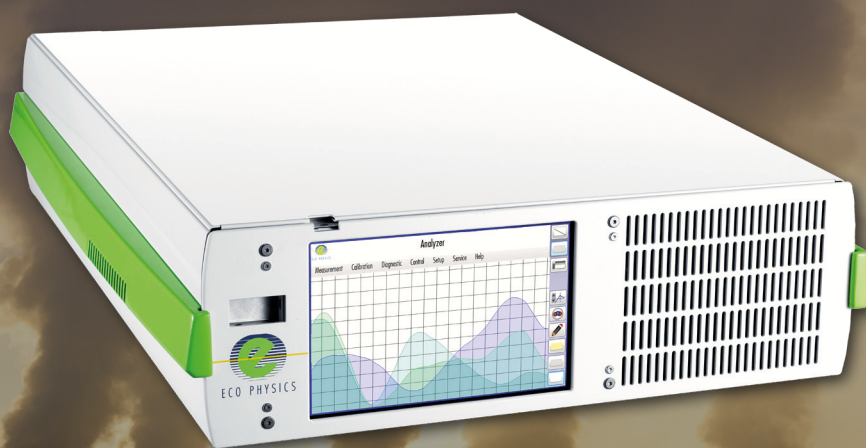

The nCLD 844 CMhr analyzer is the next generation in high precision nitrogen oxide measurement. Unique in speed and reliability, the nCLD 844 CMhr is modular designed and capable of sequentially measuring NO, NO₂, NO_x, NH₃ and NO_x-Amines. The new and intuitive graphical user interface "GUI" also individually displays and connects to other instruments' data.

Measurement of:

- NO
- NO₂
- NO_x
- NH₃
- NO_x-Amines

nCLD - A New Generation

The nCLD 844 CMhr includes everything that is needed for measuring NO, NO₂, NO_x, NH₃ and NO_x-Amines. The fully revised detector-block, the enhanced gas flow paths and the improved pressure as well as temperature independence of the nCLD 800 Series instruments allow for even lower detection limits. Overall stability and reliability are lifted to a new level. The optional electro-mechanical bypass system balances out even fastest pressure variations occurring in the sample flow. Furthermore, the analyzer is adaptable to numerous non-standardized applications. The Calibration of the unit runs quickly and automatically with all necessary data available anywhere and at any time.

User Friendliness with "GUI"


The new touch sensitive graphical user interface "GUI" enables the user to individually adjust the instrument operation and data management according to his/her needs and applications. The bright 8" monitor gives a clear overview and allows numerical and graphical display of values. Multiple digital in- and outputs guarantee a maximal connectivity for your remote operation, control and maintenance of the nCLD 844 CMhr, ensuring unsurpassed precision and reliability.

Compact, Modular and Intelligent!

The nCLD 844 CMhr is manufactured in a new compact and modular layout, in which each essential component of the chemiluminescence analyzer hosts its own CPU and interacts with other CPUs by BUS-communication. This assembly increases accessibility and serviceability by reducing wiring and piping. The measurement principle will conform to the standard method for NO_x-detection in stationary source emissions (EN 15267).

- Rapid system integration and rack mounting
- Compact and modular design
- Virtually maintenance free even in continuous operation
- Four freely selectable measuring ranges

Graphical user interface "GUI" for individual analyzer operation and data management

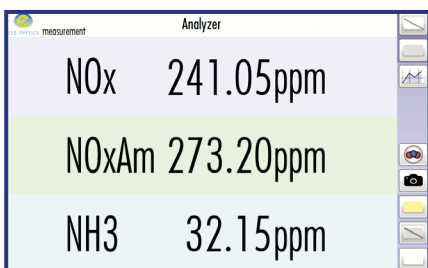

Measurably better

SPECIFICATIONS


nCLD 844 CMhr

Analyzer type	dual chamber CLD with cooled PMT for measurement of NO, NO ₂ , NO _x , NH ₃ and NO _x -Amines	Power required	350 VA (incl. membrane pump and ozone scrubber)
Measuring ranges	four freely selectable ranges from 0.5 - 500 ppm	Supply voltage	100 - 240 V/50 - 60 Hz
Min. detectable concentration*	0.012 ppm	Interface	USB(3x), HDMI, Bluetooth, RS232 (w/o 9pin connector), LAN, WLAN
Noise at zero point (1σ)*	0.006 ppm	Dimensions	height: 133 mm (5 1/4 ") width: 450 mm (19 ") with molding: 495 mm depth: 540 mm (21.2 ")
Lag time	<3 sec	Weight	23 kg (51 lb)
Rise time (0 - 90%)	<1 sec	Delivery includes	nCLD 844 CMhr analyzer, power cable, FTDI-RS232-USB cable, USB-LAN adapter, HDMI adapter
Temperature range	5 - 40 °C	Standard	nCLD 844 CMhr
Humidity tolerance	5 - 95% rel. h (non-condensing, ambient air and sample gas)	Options	<ul style="list-style-type: none"> · C - catalyst converter · M - metal converter · h - hot tubing · r - electro-mechanical pressure regulation
Sample flow rate	1.0 l/min	Analog output (External Box)	<ul style="list-style-type: none"> · USB-RS232 9pin connector · 0 - 10 V · 4 - 20 mA into 500 Ω max.
Input pressure	600 - 1'200 mbar abs.		
Dry air use for O₃ generator	internally generated (no external supply gas required)		

© ECO PHYSICS AG, Switzerland 2020 - 1/2

FLOW DIAGRAM

*Depending on filter setting
Connectivity properties are country-specific
ECO PHYSICS reserves the right to change these specifications without notice.

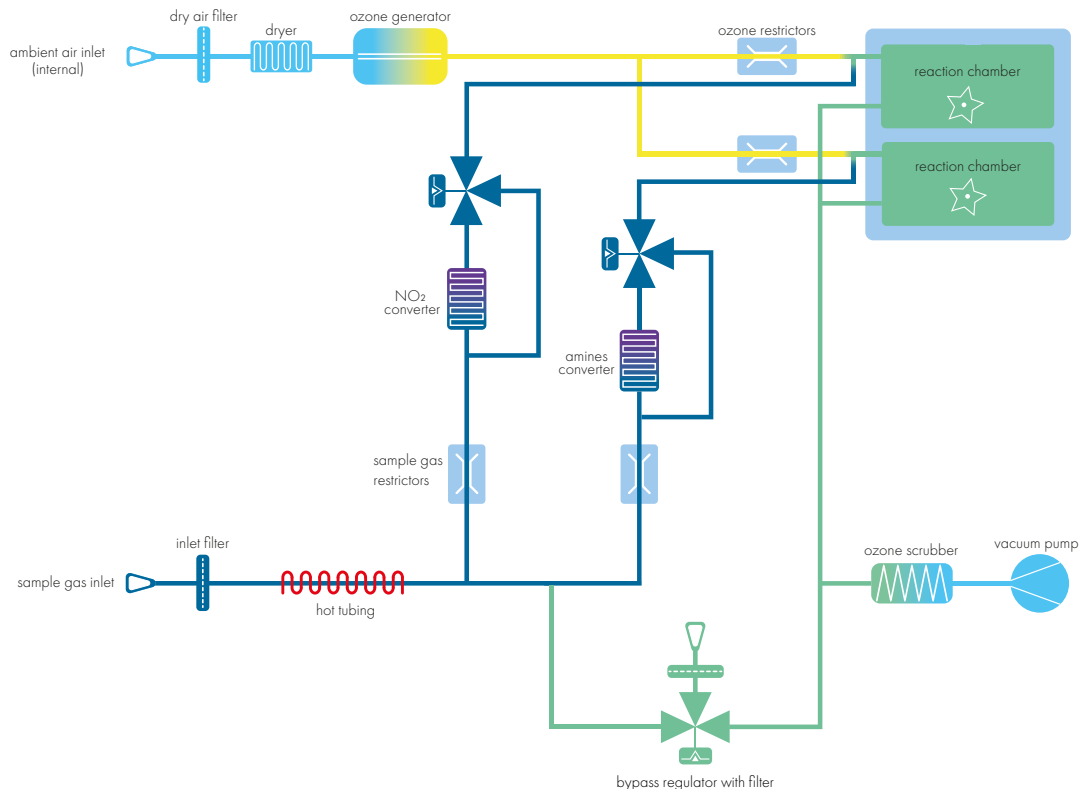

ECO PHYSICS

ECO PHYSICS AG · POB · CH-8635 DUERNTEN · TEL. +41 55 220 22 22 · FAX +41 55 220 22 55 · E-MAIL INFO@ECOPHYSICS.COM

WWW.ECOPHYSICS.COM